
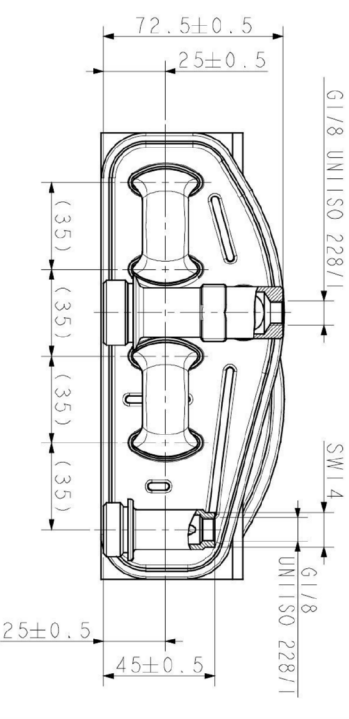


* DIMENSIONS REFERRED TO THICKNESS BEFORE PAINTING THK. 0.35 ± 0.02 and 0.8 ± 0.03

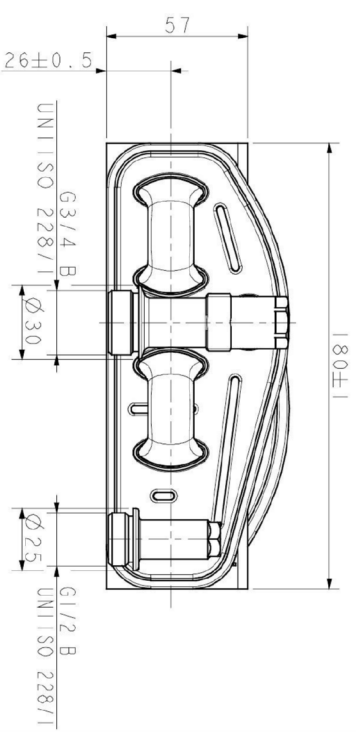

MATERIALS:		MAX PRESSURE:
		Test 16 at 20 °C :
Manifolds EN 1652 - Cu-DHP		Primary circuit 4,5 bar
Primary tube EN 12451 - Cu-DHP		Sanitary circuit 15 bar
Sanitary tube EN 1057 - Cu-DHP	Working :	
Central fins EN 1652 - Cu-DHP	Primary circuit 3 bar	
Primary connections EN 12165 CW617N	Sanitary circuit 10 bar	
Sanitary connections EN 12165 CW617N		
Sanitary elbows EN 1057 - Cu-DHP	MAX WORKING TEMPERATURES:	
Finish Coated in HIGH TEMPERATURE ALUMINUM paint	Primary circuit 110 °C	
Phosphorus brazing alloy UNI EN 1044 Class CP	Sanitary circuit 100 °C	

SOSTITUISCE		SOSTITUITO DA	
N° CODICE (CODE N°)	TIPO	STATO	NUMERO
N° DISPEND (DRW N°)	PF	PR	

Dissociation: PMS